

PLENUM + LED SIGN WIRE SUNLIGHT RESISTANT CL3P


SPEC

98P183M 1000 ft.
98P183L 500 ft.
98P183B 200 ft.



Application: Plenum LED Sign Wire, 2
conductor 18 AWG stranded tinned copper
75°C (UL) CL3P FT-6 Made in USA

RoHS

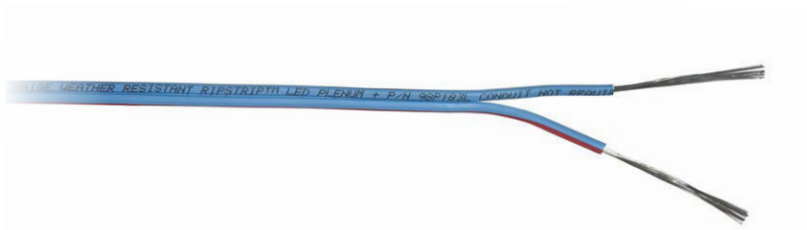

1.0 CONSTRUCTION

1.1 CONDUCTOR:

- Material: Tinned Copper
- Size: 18 AWG
- Stranding: 16 Strands

1.2 LAY LENGTH:

- This is an integral construction cable

1.3 JACKET:

- Material: Paige Compound #12056
- Wall Thickness: .020"
- O.D.: .187" x .086"
- Marking: "PAIGE WEATHER RESISTANT RIPSTRIP® LED PLENUM + P/N (*SEE BELOW) CONDUIT NOT REQUIRED E191597 18AWG 2C 75°C (UL) CL3P SUNLIGHT RESISTANT FT-6 "ROHS COMPLIANT" MADE IN USA WWW.PAIGEELECTRIC.COM" (sequential footage markers)
*98P183M – 1,000 ft. reel
98P183L – 500 ft. box
98P183B – 200 ft. bagged
- Color: Light Blue + Light Blue/Red

1.4 TEMPERATURE / VOLTAGE:

- 75°C / 300V

1.5 PACKAGING:

- P/N 98P183M – 1000 ft. reel
- P/N 98P183L – 500 ft. box
- P/N 98P183B – 200 ft. bagged

1.6 STANDARD:

- NEC/UL compliant for all applications other than "Wet" (direct exposure to the elements)

