

HanleyLED™



S-1720
(BIG)
24v



S-1270
(MINI)
12v

Introducing our NEW
DYNAMIC DUO!

STELLAR EDGE Series

LM79

LM80

L70:5+ YEARS

C  US
E 350828

CLASSIFIED
 US
E487794

warranty
10^P 5^L

CC
constant
current

24v
(BIG)

12v
(MINI)

S-1720 (BIG)

5-48"
ideal depth

S-1270 (MINI)

3-6"
ideal depth

- Edge light boxes 1 foot- 10 feet across!
- Boxes 3-48" deep
- Reduce labor by 60%
- Outdoor or indoor signs, new construction or retrofit
- HanleyPRO Layout Creator hanleyledsolutions.com

Stellar Edge Series

S-1720 & S-1270


LM79

LM80

L70:5+ YEARS

S-1720
BIG

24v

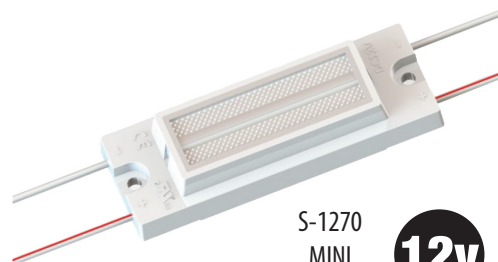S-1270
MINI

12v

Specifications

Viewing Angle	11° x 77° directional beam
Ideal Depth	For cabinets 5"-48"
Watts	7.2w/mod (6.3w/ft.)
Luminous Efficacy	111 (lm/W)
Input Voltage	24vDC
Modules/Foot	.87/ft. fully stretched
Protection Grade	IP67
Packaging	16 mods/tray (18 ft)/tray 1 tray per box 6 boxes per case
Warranty	10 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -40 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -40 ~ +158 °F
Cascade	16 mods single-ended power feed (pcs) 32 mods double-ended power feed (pcs)

Color	Part#	Color Temp	Lumens
White	HLED-S1720	6500k	800 lm/mod (697 lm/ft.)

Specifications


Viewing Angle	11° x 77° directional beam
Ideal Depth	For cabinets 3"-6"
Watts	2.7w/mod (4.12w/ft.)
Luminous Efficacy	100 (lm/W)
Input Voltage	12vDC
Modules/Foot	1.52/ft. fully stretched
Protection Grade	IP67
Packaging	Antistatic bag, 20 modules (13 ft)/bag
Warranty	10 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -40 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -40 ~ +158 °F
Cascade	20 mods single-ended power feed (pcs) 40 mods double-ended power feed (pcs)

Color	Part#	Color Temp	Lumens
White	HLED-S1270	6500k	270 lm/mod (412 lm/ft.)

	MAX POWER SUPPLY LOAD						
MODEL	35W 24v	60W 24v	96W 24v	100W 24v	150W 24v	240W 24v	288w 24v
S-1720	4mods	8mods	13mods	13mods	20mods	32mods	39mods

	MAX POWER SUPPLY LOAD						
MODEL	35W	60W	100W	120W	150W	180W	240W
S-1270	12mods	22mods	36mods	44mods	54mods	66mods	88mods


Light Distribution

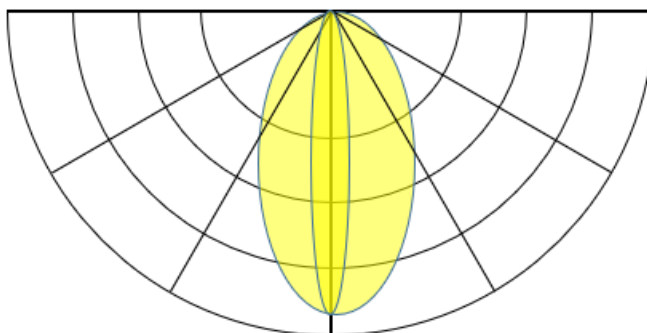

Stellar Edge Series S-1720 BIG (24 volt)

Ideal Large Cabinet Use


- Recommended Depth Range 5"-48"
- Recommended Distance Across 48"-120"

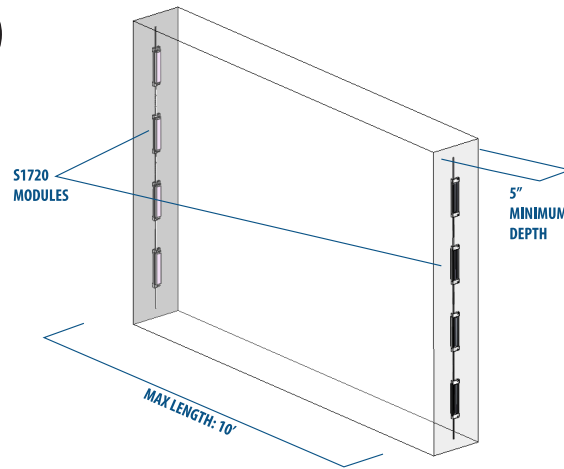

Application and Installation Diagram

MAX PERIMETER ROW DISTANCE		
Depth	Cabinet Height (MAX)	Module to Module (MAX)
5"	50"	8"
6"	60"	
7"	84"	9"
8"-9"	96"	
10"-11"	120"	
12"-15"	144"	


Profile Drawings

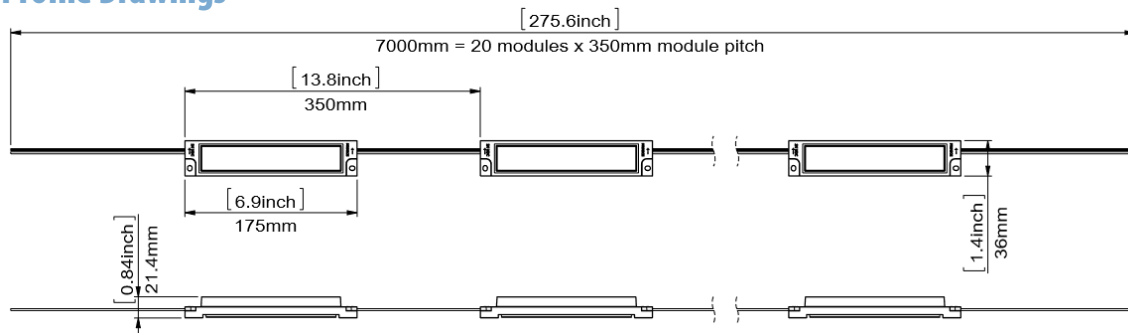

Stellar Edge Series S-1270 MINI (12 volt)

Ideal Small Cabinet Use

- Recommended Depth Range 3"-6"
- Recommended Distance Across 12"-48"

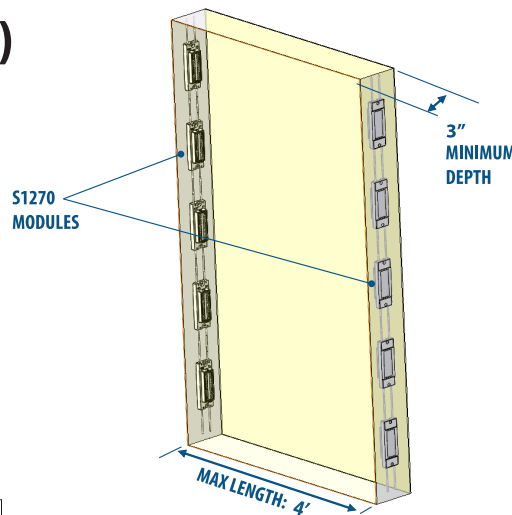

Application and Installation Diagram

MAX PERIMETER ROW DISTANCE		
Depth	Cabinet Height (MAX)	Module to Module (MAX)
3"-5"	50"	6"
6"	60"	
7"	84"	

Profile Drawings

