WS-6600

Slides into our HLED-EXTRUSION or any $\frac{1}{4}$ "C-Channel or Divider Bar





Or screw into any square tube or extrusion of your choice.




Spread Your Wings. Enjoy the FREEDOM! Wingspan 6600



HanleyLED WS-6600 Features

One Size Fits All!

Custom projects come with custom challenges. Which is why you need the 1 product that does it all. Because you only need 21 modules to illuminate a 5'x10'x12" cabinet, you can customize your experience. Whether you are fabricating hundreds of the same cabinet or building something custom, experience true FREEDOM with the High Efficiency Double Sided Wingspan 6600.

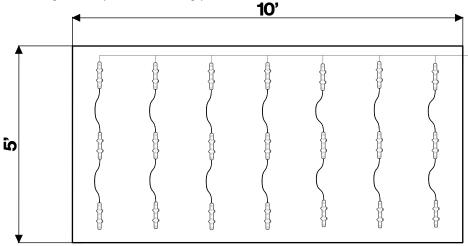

Load: 75.6 Modules: 21 Watts: 113.4 of 150.0 PS: HanleyLED 150w 24v


12" DEEP CABINET WITH 18" ROW SPACING

Customize your labor with the most versatile module for cabinet lighting. Maximize spacing for the least amount of labor ever, or customize spacing to work around internal structure and varying depths with our 175° Wingspan optics.

Customize your brightness with only 1 module every 2 feet. Space Wingspan 6600 further apart or closer together for custom brightness.

Customize your power by choosing as few or as many modules as you need.

Customize your depth by spacing WS6600 anywhere from 5" – 18" from the face



Wingspan 6600 Spacing Chart					
Double Sided Depth	MAX Row Spacing				
10"	13"				
12"	18"				
14"-15"	22"				
16″-17″	24"				
18"-19"	28"				
20"-30"	30"				

- Super Wide 175° Wingspan Optics
- Pops into any 1/4" Divider Bar or C-Channel
- Wide depth range 10" 36" Double Sided
- Efficacy: 165 lm/w
- 24 vdc
- 7yr Product / 5yr Labor Warranty

HanleyLED WS-6600 Spec Sheet

Wingspan Series

WS-6600







LM79 LM80 L70:5+ YEARS







ideal depth

(from the face)



Viewing Angle	175°		
Input Voltage	24vDC		
Watts	5.4 w/mod Customizable w/ft		
Luminous Efficacy	165(lm/W)		
Modules/Foot	.6/ft. fully stretched Customizable up to 1 mod every 2ft		
Protection Grade	IP67		
Packaging	Anti-static bag, 15 modules (25 ft)/bag		
Warranty	7 Year (Product) / 5 Year (Labor)		
Operating Temp.	-25°~ +60 °C / -13° ~ +158 °F		
Storage Temp.	-40°~ +70°C / -40° ~ +158°F		
Cascade	15 mods single-ended power feed (pcs) 30 mods double-ended power feed (pcs)		


Color	Part#	Color Temp	Lumens
Pure White	HLED-WS6600	7000K	891 lm/mod Customizable lm/ft

Features

- Super Wide 175° Wingspan Optics
- Customizable brightness with wide spacing between mods
- Extremely Wide depth range 10" 36" Double Sided
- Ideal for Double Sided Pylons, Cabinets & Retrofits
- Efficacy: 165 lm/w!
- 24" Max Centers at 8" from face (may vary depending on sign face type)
- 7yr Product / 5yr Labor Warranty
- Try HanleyPRO Layout Creator

	MAX POWER SUPPLY LOAD				
MODEL	60W	100W	150W	240W	
WS-6600	11mods	17mods	26mods	44mods	

Light Distribution



Profile Drawings

